


# uPVC RESTORER

Thompson's uPVC Restorer cleans and revives dirty and weathered uPVC. The powerful cleaning action removes ingrained dirt without scratching the surface.

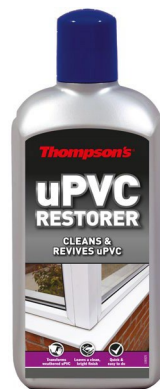

### COMPOSITION

A blend of petroleum distillates, solvents and surfactants with fillers and viscosity modifiers.

Physical Properties		
VOC	Medium	8-24.99%
Odour		Low, inoffensive
Appearance		Viscous paste
SIZES		480ml

### AREAS OF APPLICATION

Suitable for use on all white UPVC including windows, doors & conservatories.

### PREPARATION

Give the surface a wipe with a damp cloth to remove any dirt or grease.

### APPLICATION

Shake the bottle before use. Pour UPVC Restorer onto a damp cloth and work into the surface. Apply to one section of UPVC at a time, then use a dry lint free cloth to buff the surface. Try to avoid working in direct sunlight as the UPVC Restorer will dry quickly making it difficult to buff the surface.

### DRYING TIME

Product should have a working time of 5-10 Minutes depending on the surface being cleaned. Once Thompsons Advanced Brick & mortar cleaner has cleaned the surface, ensure it is cleaned to remove all remaining product. Leave surface to dry.

### IMPORTANT NOTES

- Windows should be wiped down with a damp cloth if product is spilt on them
- Brickwork should be brushed down with warm water and detergent if product is spilt on them
- PROTECT FROM FROST
- Make sure product container is fully resealed after use

### STORAGE

Store in a cool, dry, well-ventilated place away from heat and sources of ignition. Ensure container is fully re-sealed after use. To avoid the risk of spillage always store and transport in a secure and upright position.

### HEALTH AND SAFETY

Follow and observe all warnings and instructions for use shown on pack. Specific health and safety data sheets are available on request.

### DISPOSAL

Don't empty any left over product into drains or watercourses. Your local authority may have special ways to get rid of waste coatings.

### LIABILITY

The information in this Product Data sheet is based on technical knowledge and experience, and every care is taken to ensure its accuracy. This information is provided in good faith but without warranty, given ultimate results will depend on a range of factors beyond our control (such as method of application and surface conditions). We can accept no liability for the performance of products arising out of such use. Standard codes of painting practice should be followed.

### INFORMATION AND SERVICES

Our Technical Services Department will be pleased to offer specific guidance or provide any further information you may require.

Tel: 0114 240 9469

Email: [enquiry@thompsonsweatherproofing.co.uk](mailto:enquiry@thompsonsweatherproofing.co.uk)

Web: [www.thompsonsweatherproofing.co.uk](http://www.thompsonsweatherproofing.co.uk)

### SUPPLY

Obtain from DIY outlets, paint suppliers & builders' merchants.

### DATASHEETS

All Thompson's Datasheets are available on request from our Technical Services